



AGRICOLD



AGRICOLD 302 / AGRICOLD 302 YF

CHARACTERISTICS

	AGRICOLD 302	AGRICOLD 302 YF
	SCG302R	SCG302H
TYPE OF REFRIGERANT		
AUTOMATIC WORKING CYCLE No manual taps	•	•
HIGH PRECISION RECOVERY FUNCTION	•	•
AUTOMATIC OIL INJECTION with rechargeable hermetic bottles (OIL LOCK)	•	•
AUTOMATIC DYE INJECTION with rechargeable hermetic bottles (OIL LOCK)	✓	✓
HEATER BELT INCLUDED	•	•
USB PORT	•	•
INTERNAL DATA BASE including commercial and agricultural vehicles	•	•
INTEGRATED AUTOMATIC NITROGEN AND HYDRO-NITROGEN LEAK CHECK (CFU-NITRO / CFU-NITRO.HD.XX)	✓	✓
INTERNAL FLUSHING	•	•
READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	•	•
A/C SYSTEM PROFESSIONAL FLUSHING (ACC-FLUSHING)	✓	✓
A/C SYSTEM DIAGNOSYS	•	•
CONFIGURABLE GAS TYPE from 1234yf to --> 134a	•	•
BLUETOOTH CONNECTION APP OKSY [®] GEN+	•	•



• STANDARD SUPPLY ✓ OPTION

ACCESSORIES

	CODE	DESCRIPTION	AGRICOLD 302	AGRICOLD 302 YF
	ACC-88.072	Gas bottle fitting ¼	✓	
	ACC-88.011	Straight adapter HP ¼	✓	
	ACC-88-289H	Universal bottle adapter 1234YF		✓
	O-PK00051 PK00051 OPZ	Printer kit	✓	✓
	OAC0002	12 V Power supply	✓	✓



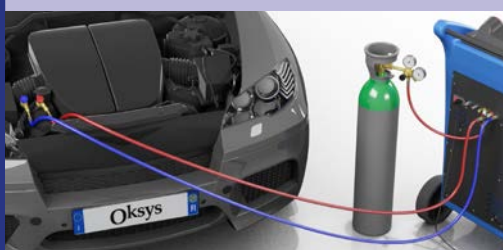
1/2021

NITROGEN LEAK CHECK OR HYDRO-NITROGEN

CODE**CFU-NITRO**

Kit for connection of 1 or 2.2 liter bottle to A/C Station - Inclusive of:

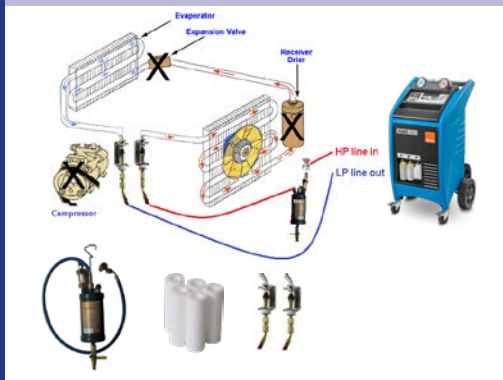
- Box
- Pressure Reducer for 1 liter and 2.2 liter bottle
- Manifold for connection A/C station

CODE**CFU-NITRO.HD.XX**

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Box
- Pressure Reducer for 200 bar bottle
- Adapter from 200 Bar to 1 liter and 2.2 liter bottle
- Manifold for connection A/C station

FLUSHING

CODE**ACC-FLUSHING
ACC-FLUSHING.YF**

Professional Refrigerant R134a or 1234y Flushing Kit. Including expansion cylinder.

RANGE

R134a**R1234yf****MODEL****AGRICOLD 302****AGRICOLD 302 YF**

TECHNICAL FEATURES

Display	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	12 Kg	12 Kg
Heater Belt	YES	YES
Scale Accuracy	+/- 5 g	+/- 5 g
Compressor	10 cc	10 cc
Vacuum Pump	100 L/min	100 L/min
Air Purge	Automatic	Automatic
Power Supply	220V 50 Hz 12V DC	220V 50 Hz 12V DC
Dimensions	55x63x86 cm	48x68x88 cm
Weight	62/71 Kg	62/71 Kg
Packaging dimensions	68x57x100 cm	68x57x100 cm

SCOPE OF DELIVERY

Hp LP Quick Couplers	Included	Included
Hoses	7,5 m	7,5 m
Blanket	NO	NO
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	Option	Option
2 x temperature probes	NO	NO

**Oksys****TOTAL DESIGN FOR
BEST PERFORMANCE**