



FAST 322



FAST 322 / FAST 322 YF

CHARACTERISTICS

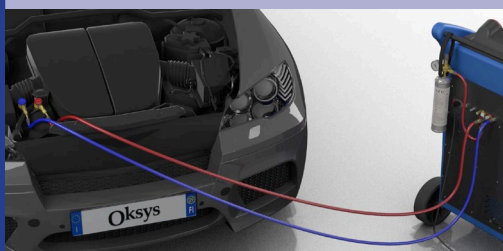
	FAST 322	FAST 322 YF
	SCF322R	SCF322H
TYPE OF REFRIGERANT		
AUTOMATIC WORKING CYCLE No manual taps	•	•
HIGH PRECISION RECOVERY FUNCTION	•	•
AUTOMATIC OIL INJECTION with rechargeable scale and hermetic bottles (OIL LOCK)	•	•
AUTOMATIC DYE INJECTION with rechargeable scale and hermetic bottles (OIL LOCK)	•	•
HEATER BELT INCLUDED	•	•
USB PORT	•	•
INTERNAL DATA BASE including commercial and agricultural vehicles	•	•
INTEGRATED AUTOMATIC NITROGEN AND HYDRO-NITROGEN LEAK CHECK (CFU-NITRO / CFU-NITRO.HD.XX)	✓	✓
STATUS INDICATORS	•	•
READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	•	•
INTERNAL FLUSHING	•	•
A/C SYSTEM PROFESSIONAL FLUSHING (ACC-FLUSHING / ACC-EASYFLUSH PLUS)	✓	✓
A/C SYSTEM DIAGNOSYS	•	•
CONFIGURABLE GAS TYPE from 1234yf to --> 134a	•	•
BLUETOOTH CONNECTION APP OKSY ^{GEN+}	•	•



• STANDARD SUPPLY ✓ OPTION

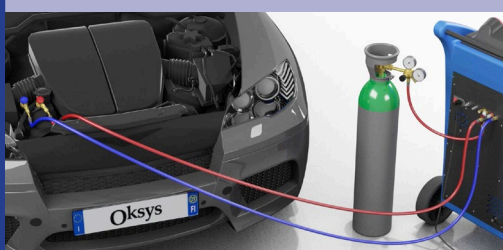
ACCESSORIES

	CODE	DESCRIPTION	FAST 322	FAST 322 YF
	ACC-88.072	Gas bottle fitting 1/4	✓	
	ACC-88.011	Straight adapter HP 1/4	✓	
	ACC-88-289H	Universal bottle adapter 1234YF		✓
	O-PK00051 PK00051 OPZ	Printer kit	•	•
	GAS ID GAS ID OPZ	SAE J 2843 internal 1234yf refrigerant identifier kit	✓	✓
	ACC-BLK-FAST300	Antidust Blanket	•	•

**NITROGEN LEAK CHECK OR HYDRO-NITROGEN****CODE** CFU-NITRO

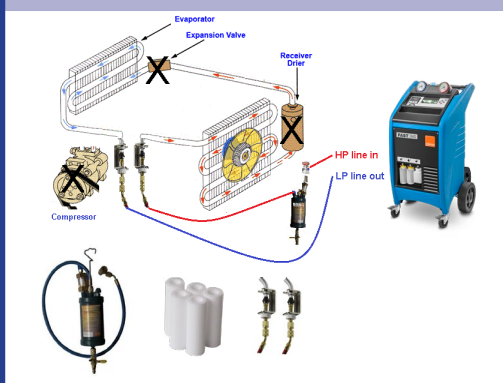
Kit for connection of 1 or 2.2 liter bottle to A/C Station - Inclusive of:

- Box
- Pressure Reducer for 1 liter and 2.2 liter bottle
- Manifold for connection A/C station

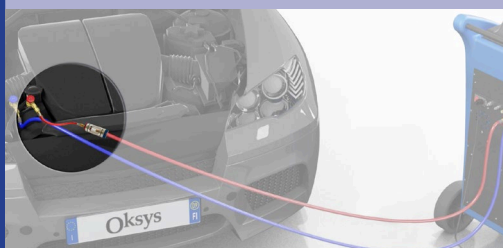
CODE CFU-NITRO.HD.XX

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Box
- Pressure Reducer for 200 bar bottle
- Adapter from 200 Bar to 1 liter and 2.2 liter bottle
- Manifold for connection A/C station

FLUSHING**CODE** ACC-FLUSHING
ACC-FLUSHING.YF

Professional Refrigerant R134a or 1234y Flushing Kit. Including expansion cylinder.

CODE ACC-EASYFLUSH PLUS

Visual diagnostic kit for system washing

RANGE

R134a



R1234yf

**MODEL****FAST 322****FAST 322 YF****TECHNICAL FEATURES**

Display	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	18 Kg	12 Kg
Heater Belt	YES	YES
Scale Accuracy	+/- 5 g	+/- 5 g
Compressor	10 cc	10 cc
Vacuum Pump	100 l/min	100 L/min
Air Purge	Automatic	Automatic
Power Supply	220V 50 Hz	220V 50 Hz
Dimensions	58x55x120 cm	58x55x120 cm
Weight	65/74 Kg	65/74 Kg
Packaging dimensions	63x63x123 cm	63x63x123 cm

SCOPE OF DELIVERY

Hp LP Quick Couplers	Included	Included
Hoses	3m	3m
Blanket	YES	YES
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	YES	YES
2 x temperature probes	Included	Included

**Oksys****TOTAL DESIGN FOR
BEST PERFORMANCE**